


BIG WHITE®

NEW ARRIVALS





WELL INFORMED

Stay up to date and always receive our current prices.
Scan the QR code now and visit us at **slv.com** or
one of our partner websites.

BIG WHITE[®]

NEW ARRIVALS





 48 V-SYSTEM
10







Light is versatile and influences every area of our life. The possibilities offered by SLV for making light a unique experience are just as versatile.

EXPERIENCE LIGHT.

48 V-SYSTEM	10
NUMINOS® PROJECTOR	28
OVAL	34
ASTO TUBE	36
SYNA GARDEN / PLANT	42
CONCRETO	44
TRUKKO	46
UNIVERSAL DOWNLIGHT	48
ACCESSORIES	52



48 V-SYSTEM

Maximum minimalism allows the new 48 V-SYSTEM to be optimally and flexibly integrated into modern interior design. Due to the secure installation on walls and ceilings, it enables special accents in the three-dimensional room design. The starting point for planning and selection is always the track in the three versions: recessed, surface mounted standard and surface mounted deep.



48 V TRACK SYSTEM, DALI

48 V DC

max. current: 16 A



Black



White

Material: Aluminium

Version		Prod. no.	Dimensions
1 m	Black, surface mounted standard	1006541	L: 100 cm, W: 2.62 cm, H: 2.26 cm
	White, surface mounted standard	1006542	
2 m	Black, surface mounted standard	1006543	L: 200 cm, W: 2.62 cm, H: 2.26 cm
	White, surface mounted standard	1006544	
3 m	Black, surface mounted standard	1006545	L: 300 cm, W: 2.62 cm, H: 2.26 cm
	White, surface mounted standard	1006546	
4 m	Black, surface mounted standard	1006547	L: 400 cm, W: 2.62 cm, H: 2.26 cm
	White, surface mounted standard	1006548	

Version		Prod. no.	Dimensions
1 m	Black, surface mounted deep	1006549	L: 100 cm, W: 2.62 cm, H: 4.72 cm
	White, surface mounted deep	1006550	
2 m	Black, surface mounted deep	1006551	L: 200 cm, W: 2.62 cm, H: 4.72 cm
	White, surface mounted deep	1006552	
3 m	Black, surface mounted deep	1006553	L: 300 cm, W: 2.62 cm, H: 4.72 cm
	White, surface mounted deep	1006554	
4 m	Black, surface mounted deep	1006555	L: 400 cm, W: 2.62 cm, H: 4.72 cm
	White, surface mounted deep	1006556	

Version		Prod. no.	Dimensions
1 m	Black, recessed	1006557	L: 100 cm, W: 7.4 cm, H: 4.7 cm
	White, recessed	1006558	
2 m	Black, recessed	1006559	L: 200 cm, W: 7.4 cm, H: 4.7 cm
	White, recessed	1006560	
3 m	Black, recessed	1006561	L: 300 cm, W: 7.4 cm, H: 4.7 cm
	White, recessed	1006562	
4 m	Black, recessed	1006563	L: 400 cm, W: 7.4 cm, H: 4.7 cm
	White, recessed	1006564	

fischer 

Including fischer
DUOPOWER dowel

+ 48 V MOUNTING TRACK STANDARD

Product		Prod. no.	Output	Dimensions
L-connector mechanical	Black	1006575		L: 7.1 cm, W: 7.1 cm, H: 2.19 cm
Mounting track standard, left, ceiling Aluminium	White	1006576		
L-connector mechanical	Black	1006577		L: 7.1 cm, W: 7.1 cm, H: 2.19 cm
Mounting track standard, right, ceiling Aluminium	White	1006578		
L-connector mechanical	Black	1006579		L: 8.4 cm, W: 2.62 cm, H: 8.4 cm
Mounting track standard, wall / ceiling Aluminium	White	1006580		
Joint connector	Grey	1006609		L: 5 cm, W: 1.32 cm, H: 0.25 cm
End cap	Black	1006593		L: 2.6 cm, W: 0.2 cm, H: 2.2 cm
Mounting track standard Polycarbonate (PC)	White	1006594		
Track cover	Black	1006611		L: 200 cm, W: 2 cm, H: 0.6 cm
Mounting rail standard 2m 20 mm, aluminium / polycarbonate (PC)	White	1006612		

+ 48 V MOUNTING TRACK DEEP

Product		Prod. no.	Output	Dimensions
L-connector mechanical	Black	1006581		L: 7.1 cm, W: 7.1 cm, H: 4.7 cm
Mounting track deep, left, ceiling Aluminium	White	1006582		
L-connector mechanical	Black	1006583		L: 7.1 cm, W: 7.1 cm, H: 4.7 cm
Mounting track deep, right, ceiling Aluminium	White	1006584		
L-connector mechanical	Black	1006585		L: 8.4 cm, W: 8.4 cm, H: 4.7 cm
Mounting track deep, right, wall / ceiling Aluminium	White	1006586		
Joint connector	Grey	1006609		L: 5 cm, W: 1.32 cm, H: 0.25 cm
End cap	Black	1006595		L: 2.6 cm, W: 0.2 cm, H: 4.7 cm
Mounting track deep Polycarbonate (PC)	White	1006596		
Track cover	Black	1007188		L: 200 cm, W: 2.6 cm, H: 6 cm
Mounting track deep and recessed track 2m 26 mm, IP20, polycarbonate (PC)	White	1007189		

+ 48 V RECESSED TRACK

Product		Prod. no.	Output	Dimensions
L-connector mechanical	Black	1006587		L: 9.5 cm, W: 9.5 cm, H: 4.69 cm
Recessed track, left, ceiling Aluminium	White	1006588		
L-connector mechanical	Black	1006589		L: 9.5 cm, W: 9.5 cm, H: 4.69 cm
Recessed track, right, ceiling Aluminium	White	1006590		
L-connector mechanical	Black	1006591		L: 8.1 cm, W: 7.4 cm, H: 8.1 cm
Recessed track, right, wall / ceiling Aluminium	White	1006592		
End cap	Black	1006597		L: 3.4 cm, W: 0.2 cm, H: 4.7 cm
Recessed track Polycarbonate (PC)	White	1006598		
Joint connector	Grey	1006610		L: 6.3 cm, W: 0.76 cm, H: 0.25 cm
Track cover	Black	1007188		L: 200 cm, W: 2.6 cm, H: 6 cm
Recessed track and recessed track 2m 26 mm, IP20, polycarbonate (PC)	White	1007189		

ALL 48 V TRACKS


Product		Prod. no.	Output	Dimensions
Longitudinal connector electrical DALI Polycarbonate (PC)	Black	1006569	max. 16 A	L: 14.4 cm, W: 1.6 cm, H: 1.9 cm
	White	1006570		
L-connector electric DALI Polycarbonate (PC)	Black	1006571	max. 16 A	L: 11.4 cm, W: 11.4 cm, H: 1.9 cm
	White	1006572		
Flexible connector electric DALI Polycarbonate (PC)	Black	1006573	max. 16 A	L: 23 cm, W: 1.6 cm, H: 1.9 cm
	White	1006574		
End feed DALI, left Polycarbonate (PC)	Black	1006565	max. 16 A	L: 9.7 cm, W: 1.6 cm, H: 1.9 cm
	White	1006566		
End feed DALI, right Polycarbonate (PC)	Black	1006567	max. 16 A	L: 9.7 cm, W: 1.6 cm, H: 1.9 cm
	White	1006568		
Joint connector with suspension set, 1 m rod Steel	Black	1006601		L: 12 cm, W: 2.7 cm
	White	1006602		
Joint connector with suspension set, 3 m wire rope Steel	Black	1006603		L: 12 cm, W: 2.7 cm
	White	1006604		
Pendant suspension 1 m rod Steel	Black	1006605		W: 2.9 cm
	White	1006606		
Pendant suspension 3 m wire rope Steel	Black	1006607		W: 2.9 cm
	White	1006608		
Mounting bracket Aluminium	Black	1006599		L: 3 cm, H: 10.5 cm
	White	1006600		
Power adapter housing incl. end feed DALI left, polycarbonate (PC)	Black	1007083		L: 23.3 cm, W: 10.1 cm, H: 4.1 cm
	White	1007084		
Power adapter housing incl. end feed DALI, IP20 right, polycarbonate (PC)	Black	1007137		L: 23.3 cm, W: 10.1 cm, H: 4.1 cm
	White	1007138		
Power adapter Polycarbonate (PC)	White	1006613	48 V 60 W	L: 18 cm, W: 4.5 cm, H: 2.7 cm
Power adapter Metal	Black	1006614	48 V 150 W	L: 19.05 cm, W: 8.8 cm, H: 3.55 cm

PLANNING TOOL


MOUNTING TRACK STANDARD




MOUNTING TRACK DEEP




RECESSED TRACK

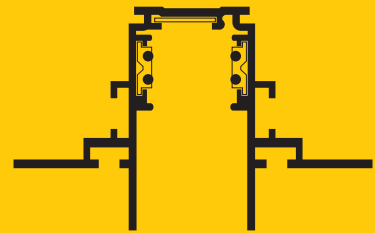


48 V MOUNTING TRACK STANDARD

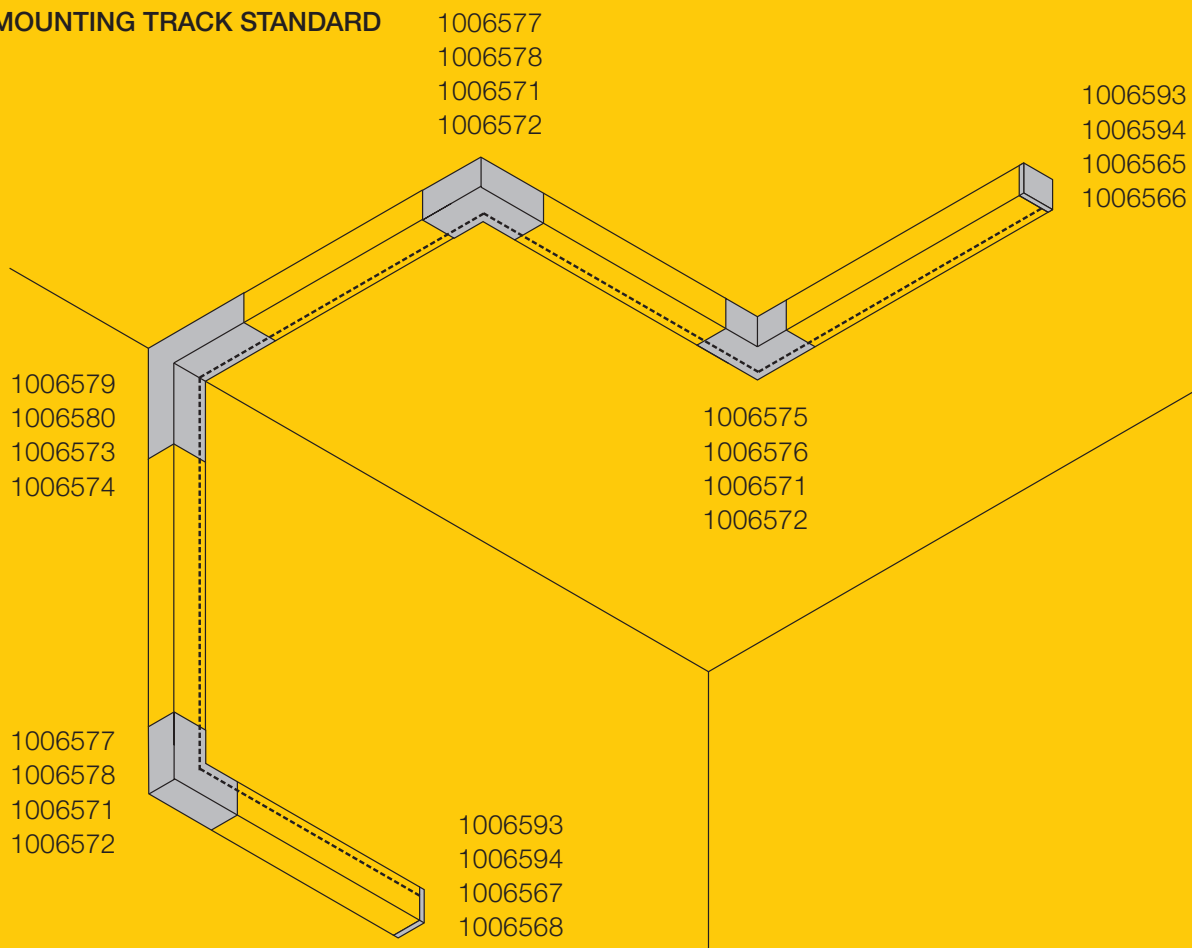

48 V MOUNTING TRACK DEEP

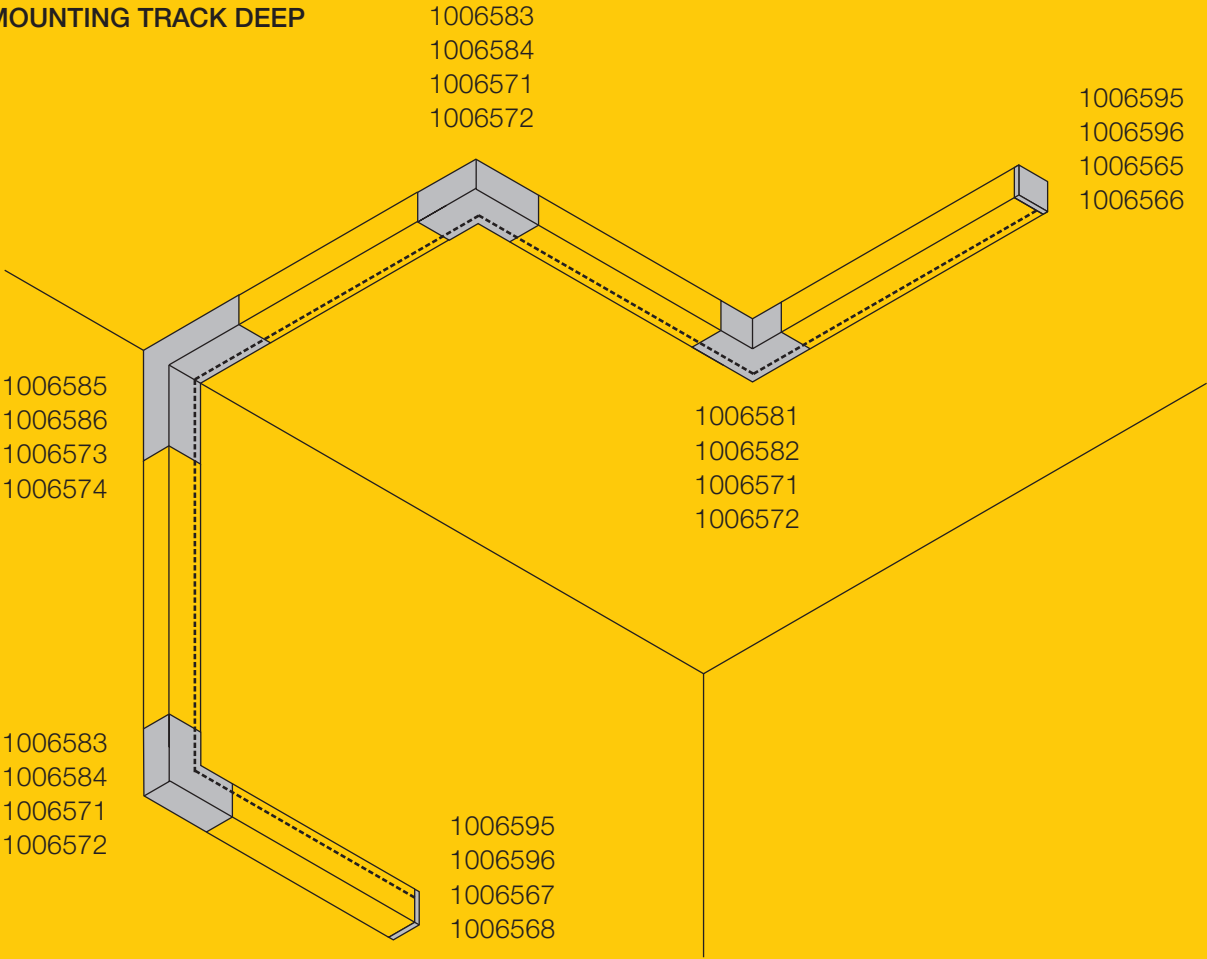

48 V RECESSED TRACK

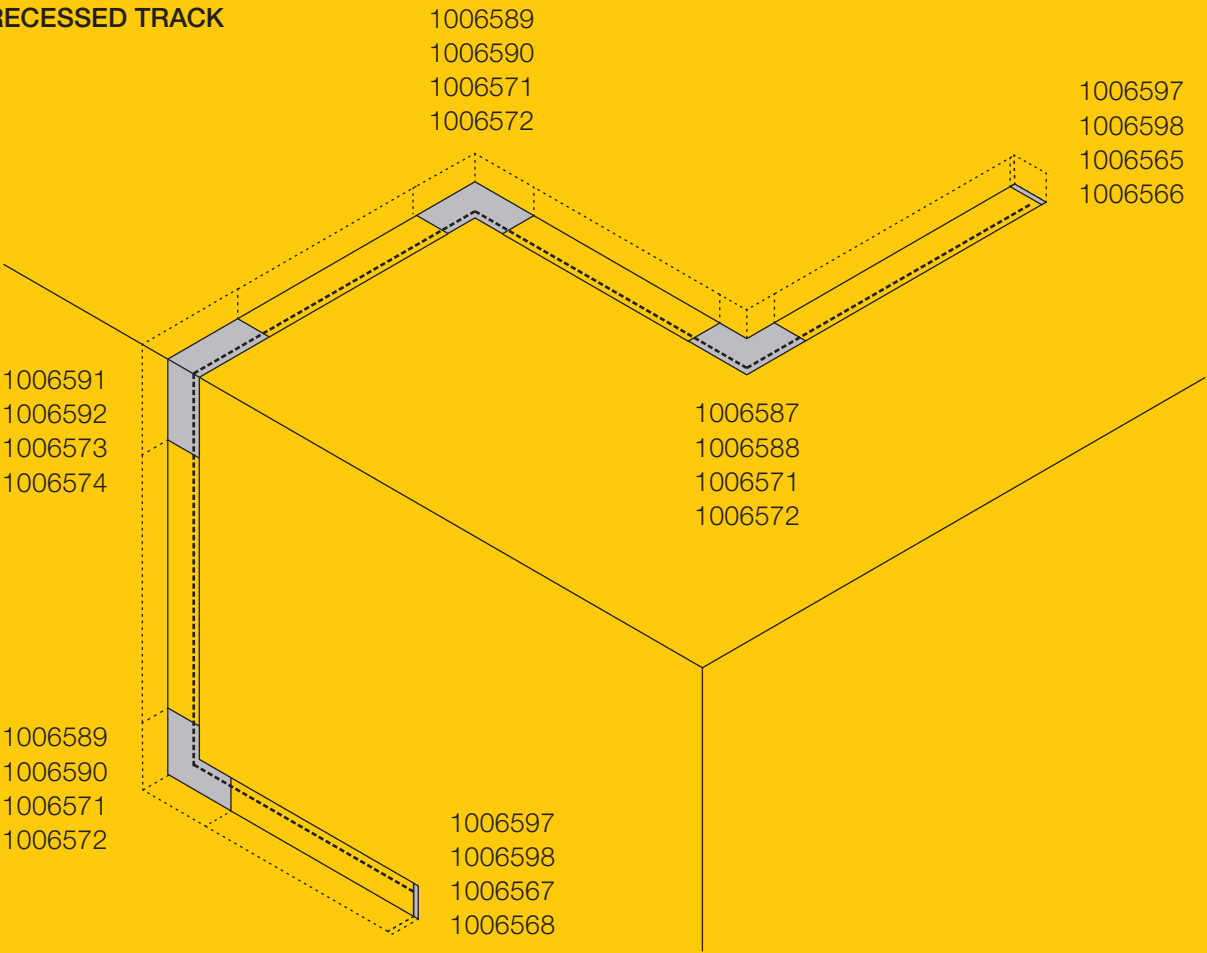









48 V-SYSTEM | NUMINOS®

The integration of NUMINOS® light into the 48 V-SYSTEM offers the advantage of optimal combinability with other lights from the family. The uniform lighting quality and selection from a wide variety of versions offers more room for ideas: luminous flux, light colour and half-diffusion angle of the DALI-compatible spots and pendant lights can be selected as required by the project. With their clear design language, they blend into any design ambience.




NUMINOS® XS

48 V | 200 mA
Total wattage: 8.7 W

NUMINOS® S


48 V | 350 mA
Total wattage: 16 W



Material: Aluminium



Product	Prod. no.
	Ellipse
	1005612
Diffuser	Prism
NUMINOS® XS	1005613
	Frosted
	1005614
	Honeycomb
	1005615
	Ellipse
	1004786
Diffuser	Prism
NUMINOS® S	1004787
	Frosted
	1004788
	Honeycomb
	1004789

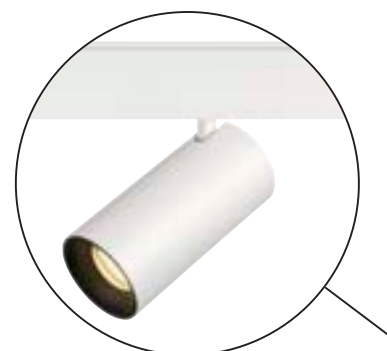

In the deep versions of the 48 V track, the adapter completely disappears visually.

XS NUMINOS® SPOT XS
Ø 5 cm; L: 8 cm, H: 8 cm

S NUMINOS® SPOT S
Ø 6 cm; L: 12.5 cm, H: 9 cm

	10066511	1006705	48 V 200 mA Total wattage: 8.7 W	48 V 350 mA Total wattage: 16 W	2700 K	640 lm	1000 lm	20°	UGR16	UGR19
	1006654	1006708				620 lm	970 lm	40°	UGR22	UGR16
	1006657	1006711				640 lm	960 lm	55°	UGR25	UGR19
	1006669	1006723			3000 K	700 lm	1060 lm	20°	UGR16	UGR19
	1006672	1006726				670 lm	1030 lm	40°	UGR22	UGR19
	1006675	1006729				690 lm	1030 lm	55°	UGR25	UGR22
	1006652	1006706	48 V 200 mA Total wattage: 8.7 W	48 V 350 mA Total wattage: 16 W	2700 K	670 lm	1020 lm	20°	UGR16	UGR19
	1006655	1006709				650 lm	1050 lm	40°	UGR22	UGR16
	1006658	1006712				670 lm	1030 lm	55°	UGR25	UGR19
	1006670	1006724			3000 K	730 lm	1120 lm	20°	UGR16	UGR19
	1006673	1006727				700 lm	1120 lm	40°	UGR22	UGR19
	1006676	1006730				720 lm	1120 lm	55°	UGR25	UGR22
	1006653	1006707	48 V 200 mA Total wattage: 8.7 W	48 V 350 mA Total wattage: 16 W	2700 K	670 lm	960 lm	20°	UGR16	UGR19
	1006656	1006710				650 lm	1000 lm	40°	UGR22	UGR16
	1006659	1006713				670 lm	980 lm	55°	UGR25	UGR19
	1006671	1006725			3000 K	730 lm	1050 lm	20°	UGR16	UGR19
	1006674	1006728				700 lm	1050 lm	40°	UGR22	UGR19
	1006677	1006731				720 lm	1050 lm	55°	UGR25	UGR22
	1006661	1006715	48 V 200 mA Total wattage: 8.7 W	48 V 350 mA Total wattage: 16 W	2700 K	670 lm	1020 lm	20°	UGR16	UGR19
	1006664	1006718				650 lm	1050 lm	40°	UGR22	UGR16
	1006667	1006721				670 lm	1030 lm	55°	UGR25	UGR19
	1006679	1006733			3000 K	730 lm	1120 lm	20°	UGR16	UGR19
	1006682	1006736				700 lm	1120 lm	40°	UGR22	UGR19
	1006685	1006739				720 lm	1120 lm	55°	UGR25	UGR22
	1006660	1006714	48 V 200 mA Total wattage: 8.7 W	48 V 350 mA Total wattage: 16 W	2700 K	640 lm	1000 lm	20°	UGR16	UGR19
	1006663	1006717				620 lm	970 lm	40°	UGR22	UGR16
	1006666	1006720				640 lm	960 lm	55°	UGR25	UGR19
	1006678	1006732			3000 K	700 lm	1060 lm	20°	UGR16	UGR19
	1006681	1006735				670 lm	1030 lm	40°	UGR22	UGR19
	1006684	1006738				690 lm	1030 lm	55°	UGR25	UGR22
	1006662	1006716	48 V 200 mA Total wattage: 8.7 W	48 V 350 mA Total wattage: 16 W	2700 K	670 lm	960 lm	20°	UGR16	UGR19
	1006665	1006719				650 lm	1000 lm	40°	UGR22	UGR16
	1006668	1006722				670 lm	980 lm	55°	UGR25	UGR19
	1006680	1006734			3000 K	730 lm	1050 lm	20°	UGR16	UGR19
	1006683	1006737				700 lm	1050 lm	40°	UGR22	UGR19
	1006686	1006740				720 lm	1050 lm	55°	UGR25	UGR22

These lights are also available as 4000 K versions on request (except XS). Please note the different delivery times and minimum order quantities.

XS NUMINOS® PENDANT LIGHT XS

Ø 5 cm; L: 8 cm
Suspension height 150 cm

S NUMINOS® PENDANT LIGHT S

Ø 6 cm; L: 12.5 cm
Suspension height 150 cm


	1006759	1006813	48 V 200 mA Total wattage: 8.7 W	48 V 350 mA Total wattage: 16 W	2700 K	460 lm	1000 lm	20°	UGR16	UGR19
	1006762	1006816				620 lm	970 lm	40°	UGR22	UGR16
	1006765	1006819				640 lm	960 lm	55°	UGR25	UGR22
	1006777	1006831			3000 K	700 lm	1060 lm	20°	UGR16	UGR19
	1006780	1006834				670 lm	1030 lm	40°	UGR22	UGR19
	1006783	1006837				690 lm	1030 lm	55°	UGR25	UGR22
	1006760	1006814	48 V 200 mA Total wattage: 8.7 W	48 V 350 mA Total wattage: 16 W	2700 K	670 lm	1020 lm	20°	UGR16	UGR19
	1006763	1006817				650 lm	1050 lm	40°	UGR22	UGR16
	1006766	1006820				670 lm	1030 lm	55°	UGR25	UGR22
	1006778	1006832			3000 K	730 lm	1120 lm	20°	UGR16	UGR19
	1006781	1006835				700 lm	1120 lm	40°	UGR22	UGR19
	1006784	1006838				720 lm	1120 lm	55°	UGR25	UGR22
	1006761	1006815	48 V 200 mA Total wattage: 8.7 W	48 V 350 mA Total wattage: 16 W	2700 K	670 lm	960 lm	20°	UGR16	UGR19
	1006764	1006818				650 lm	1000 lm	40°	UGR22	UGR16
	1006767	1006821				670 lm	980 lm	55°	UGR25	UGR22
	1006779	1006833			3000 K	730 lm	1050 lm	20°	UGR16	UGR19
	1006782	1006836				700 lm	1050 lm	40°	UGR22	UGR19
	1006785	1006839				720 lm	1050 lm	55°	UGR25	UGR22
	1006769	1006823	48 V 200 mA Total wattage: 8.7 W	48 V 350 mA Total wattage: 16 W	2700 K	670 lm	1020 lm	20°	UGR16	UGR19
	1006772	1006826				650 lm	1050 lm	40°	UGR22	UGR16
	1006775	1006829				670 lm	1030 lm	55°	UGR25	UGR22
	1006787	1006841			3000 K	730 lm	1120 lm	20°	UGR16	UGR19
	1006790	1006844				700 lm	1120 lm	40°	UGR22	UGR19
	1006793	1006847				720 lm	1120 lm	55°	UGR25	UGR22
	1006771	1006822	48 V 200 mA Total wattage: 8.7 W	48 V 350 mA Total wattage: 16 W	2700 K	620 lm	1000 lm	20°	UGR16	UGR19
	1006768	1006825				640 lm	970 lm	40°	UGR22	UGR16
	1006774	1006828				640 lm	960 lm	55°	UGR25	UGR22
	1006786	1006840			3000 K	700 lm	1060 lm	20°	UGR16	UGR19
	1006789	1006843				670 lm	1030 lm	40°	UGR22	UGR19
	1006792	1006846				690 lm	1030 lm	55°	UGR25	UGR22
	1006770	1006824	48 V 200 mA Total wattage: 8.7 W	48 V 350 mA Total wattage: 16 W	2700 K	670 lm	960 lm	20°	UGR16	UGR19
	1006773	1006827				650 lm	1000 lm	40°	UGR22	UGR16
	1006776	1006830				670 lm	980 lm	55°	UGR25	UGR22
	1006788	1006842			3000 K	730 lm	1050 lm	20°	UGR16	UGR19
	1006791	1006845				700 lm	1050 lm	40°	UGR22	UGR19
	1006794	1006848				720 lm	1050 lm	55°	UGR25	UGR22

These lights are also available as 4000 K versions on request (except XS). Please note the different delivery times and minimum order quantities.

48 V-SYSTEM | IN-LINE

The IN-LINE linear lights form a unit in the 48 V-SYSTEM that brings out only the best: High-quality light in various lumen intensities, lengths and colour temperatures. To integrate basic lighting into modern interior design, there is a choice between rigid and pivoting versions and opal optics, or darklight reflectors that provide perfect glare control and create a pleasant room atmosphere.



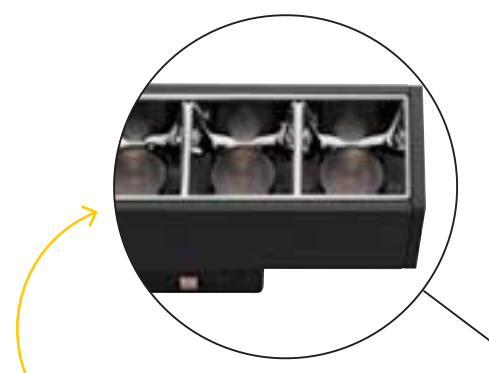

Darklight Reflector
versions with UGR 16



IN-LINE 22

48 V | 350 mA
Total wattage: 7.3 W

● Black ○ White

IN-LINE 44

48 V | 350 mA
Total wattage: 14 W


IN-LINE 22 + 44 Darklight Reflector

Material: Aluminium / Polycarbonate (PC)

Version		Prod. no.	Lumen	Kelvin	CRI	Dimensions
22	Black	1006615	Down: 540 lm	2700 K	90	L: 22 cm, W: 2.2 cm, H: 2.5 cm
	White	1006616				
	Black	1006617	Down: 570 lm	3000 K		
	White	1006618				
22	Black, Darklight Reflector	1006627	Down: 580 lm	2700 K	90	L: 22 cm, W: 2.2 cm, H: 2.5 cm
	White, Darklight Reflector	1006628				
	Black, Darklight Reflector	1006629	Down: 610 lm	3000 K		
	White, Darklight Reflector	1006630				
44	Black	1006621	Down: 1140 lm	2700 K	90	L: 43.5 cm, W: 2.2 cm, H: 2.5 cm
	White	1006622				
	Black	1006623	Down: 1180 lm	3000 K		
	White	1006624				
44	Black, Darklight Reflector	1006633	Down: 1180 lm	2700 K	90	L: 43.5 cm, W: 2.2 cm, H: 2.5 cm
	White, Darklight Reflector	1006634				
	Black, Darklight Reflector	1006635	Down: 1230 lm	3000 K		
	White, Darklight Reflector	1006636				

These lights are also available as 4000 K versions on request. Please note the different delivery times and minimum order quantities.



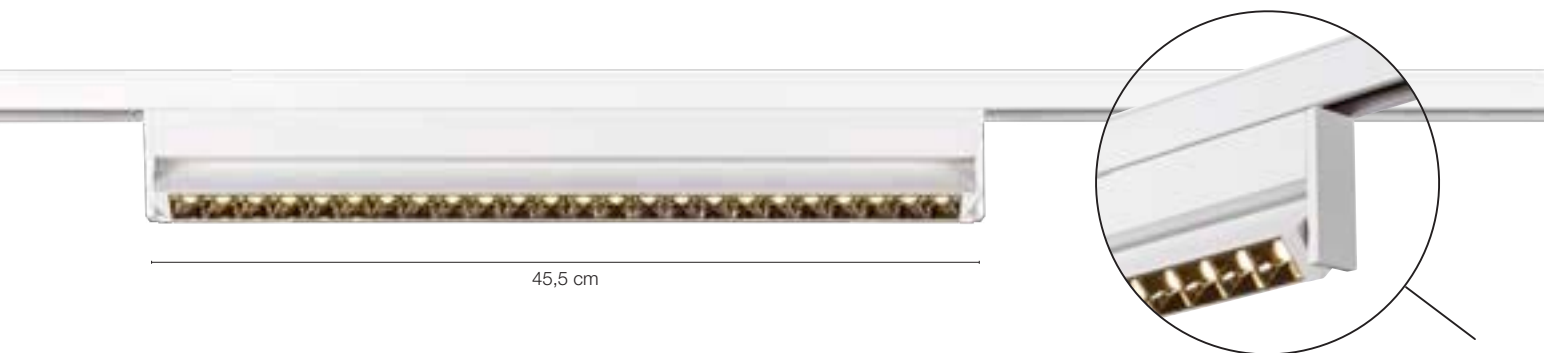

IN-LINE 24 MOVE

48 V | 350 mA
Total wattage: 7.3 W

● Black ○ White

IN-LINE 46 MOVE

48 V | 350 mA
Total wattage: 14 W


Material: Aluminium / Polycarbonate (PC)

Version		Prod. no.	Lumen	Kelvin	CRI	Dimensions
24 Move	Black, Darklight Reflector	1006639	Down: 580 lm	2700 K	90	L: 24 cm, W: 2.2 cm, H: 5.7 cm
	White, Darklight Reflector	1006640				
	Black, Darklight Reflector	1006641	Down: 610 lm	3000 K		
	White, Darklight Reflector	1006642				
46 Move	Black, Darklight Reflector	1006645	Down: 1180 lm	2700 K	90	L: 45.5 cm, W: 2.2 cm, H: 2.5 cm
	White, Darklight Reflector	1006646				
	Black, Darklight Reflector	1006647	Down: 1230 lm	3000 K		
	White, Darklight Reflector	1006648				

These lights are also available as 4000 K versions on request. Please note the different delivery times and minimum order quantities.

CONFIGURE YOUR 48 V-SYSTEM

Select your track version in the appropriate length, desired colour and preferred installation method. Choose the recessed version or one of the two surface-mounted versions. With the NUMINOS® and IN-LINE lights specially designed for the SLV 48 V-SYSTEM, they are particularly flexible and perfectly set the scene for their surroundings.

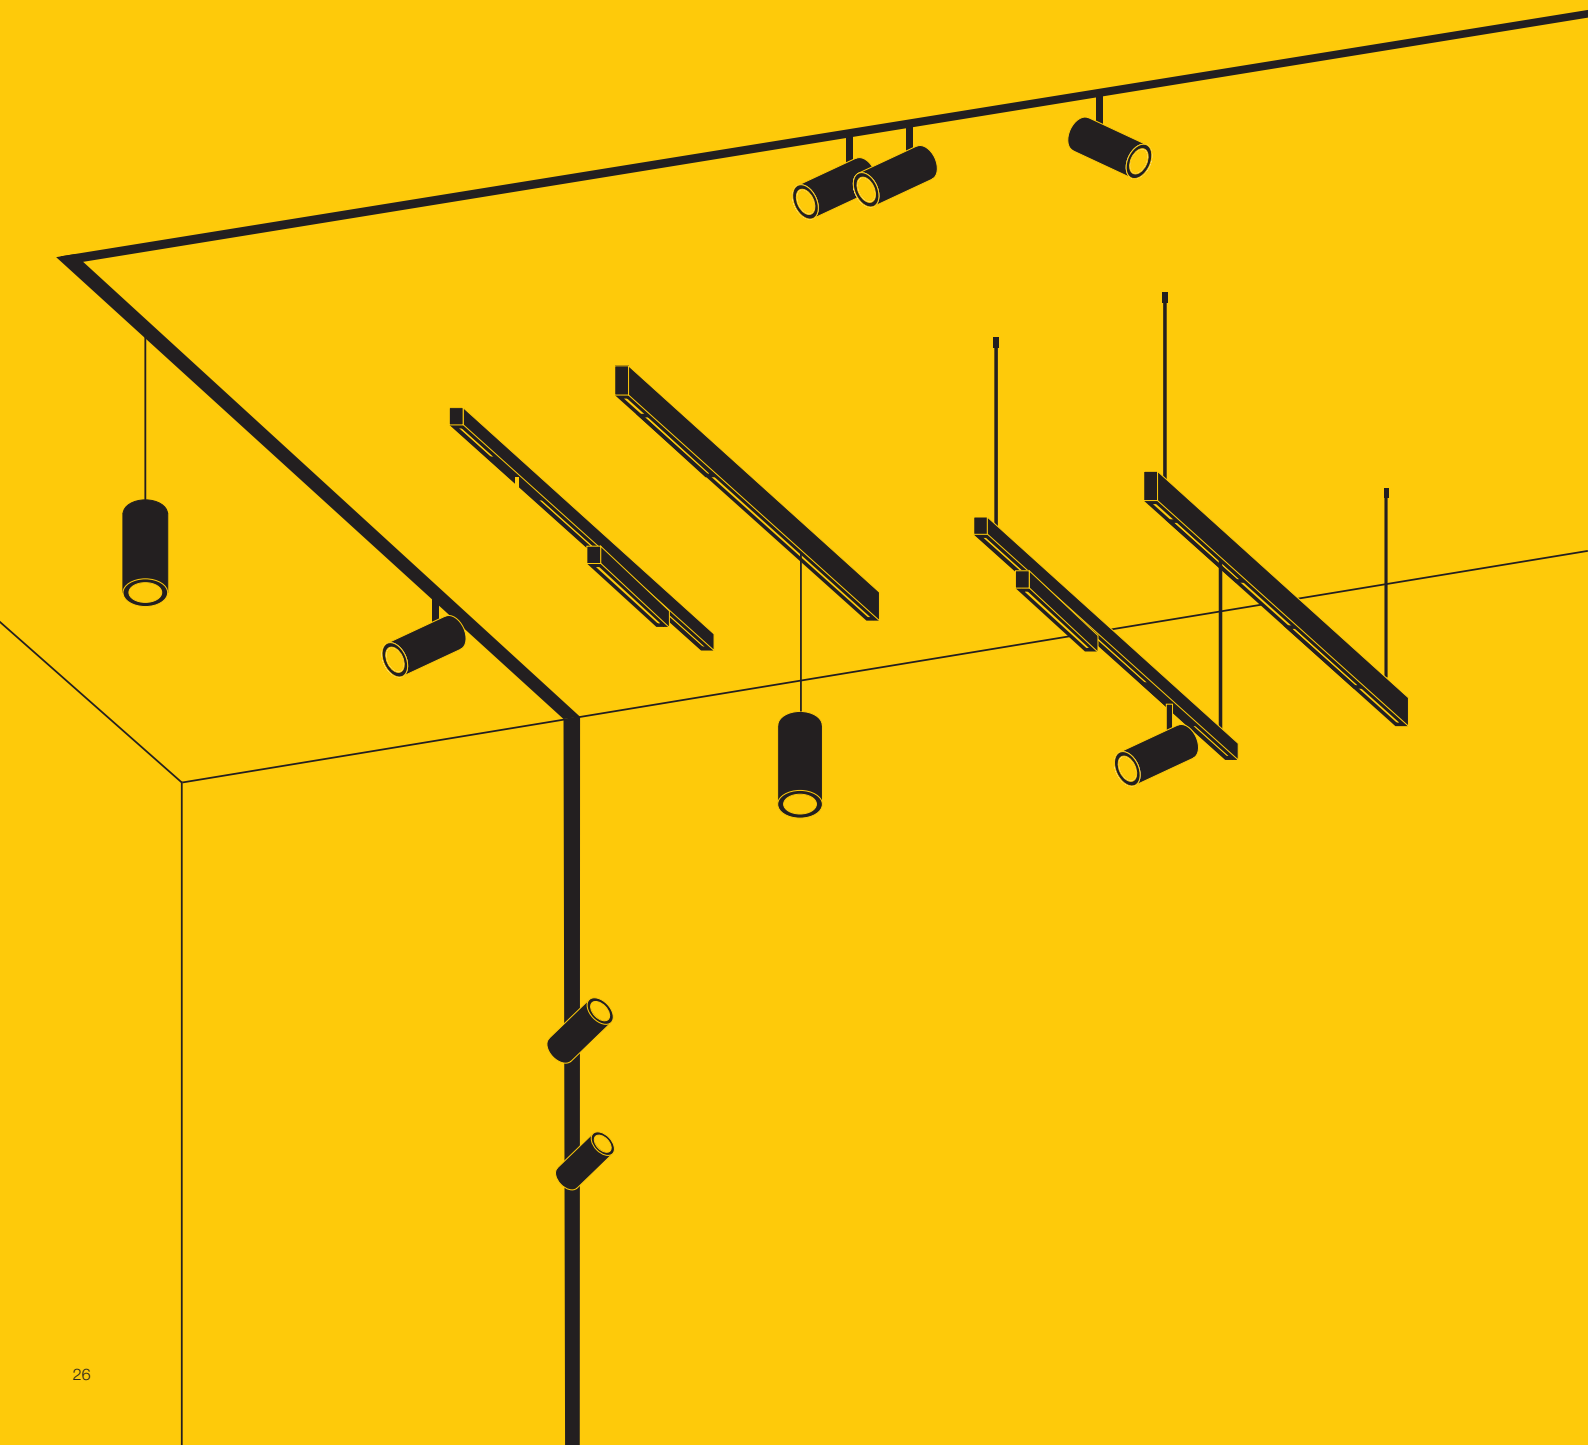


CHOOSE YOUR TRACK


MOUNTING TRACK STANDARD



MOUNTING TRACK DEEP



RECESSED TRACK

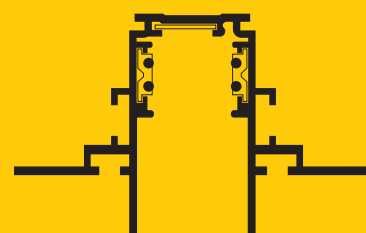

CHOOSE YOUR PREFERRED INSTALLATION

SURFACE MOUNTED



Ceiling



Wall



Pendant

RECESSED



Ceiling



Wall



CHOOSE YOUR LIGHTS

NUMINOS®
SPOT AND PENDANT LIGHT



IN-LINE, IN-LINE DARKLIGHT REFLECTOR
AND IN-LINE MOVE



CHOOSE YOUR ACCESSORIES

VARIOUS CONNECTORS, COVERS, SUSPENSIONS,
POWER ADAPTERS, ETC.

NUMINOS® PROJECTOR

The multi-talent NUMINOS® PROJECTOR cuts a fine figure in any environment and shows its merits. Thanks to the large rotation and pivot range, the light is suitable for both accent lighting and basic lighting, and provides high-quality light in your rooms. Total wattages, colour temperatures and half-diffusion angles can be individually selected.



Expansion of the
NUMINOS® Series
in sizes XS-L





NUMINOS® PROJECTOR XS

220-240 V ~50/60 Hz | 200 mA
Power consumption: 7 W

NUMINOS® PROJECTOR M


220-240 V ~50/60 Hz | 500 mA
Power consumption: 17.5 W

NUMINOS® PROJECTOR S

220-240 V ~50/60 Hz | 250 mA
Power consumption: 8.6 W

NUMINOS® PROJECTOR L

220-240 V ~50/60 Hz | 700 mA
Power consumption: 25.4 W



Material: Aluminium



Product		Prod. no.
Diffuser NUMINOS® XS	Elipse	1005612
	Prism	1005613
	Frosted	1005614
	Honeycomb	1005615
Diffuser NUMINOS® S	Elipse	1004786
	Prism	1004787
	Frosted	1004788
	Honeycomb	1004789
Diffuser NUMINOS® M	Elipse	1004790
	Prism	1004791
	Frosted	1004792
	Honeycomb	1004793
Diffuser NUMINOS® L	Elipse	1004794
	Prism	1004795
	Frosted	1004796
	Honeycomb	1004797



The application of the NUMINOS® PROJECTOR is individually selectable

NUMINOS® PROJECTOR DL MOVE

XS NUMINOS® PROJECTOR XS

Ø 4.9 cm; L: 8 cm



10 cm Ø 6,8 cm

S NUMINOS® PROJECTOR S

Ø 6 cm; L: 12.5 cm



15 cm Ø 8,8 cm


	1006867	1006921	220-240 V ~50/60 Hz 200 mA Total wattage: 7 W	220-240 V ~50/60 Hz 250 mA Total wattage: 8.6 W	2700 K	640 lm	670 lm	20°	UGR16	UGR19
	1006870	1006924				620 lm	670 lm	40°	UGR22	UGR19
	1006873	1006927				640 lm	670 lm	55°	UGR25	UGR22
	1006885	1006939			3000 K	700 lm	690 lm	20°	UGR16	UGR19
	1006888	1006942				670 lm	690 lm	40°	UGR22	UGR19
	1006891	1006945				690 lm	690 lm	55°	UGR25	UGR22
	1006868	1006922	220-240 V ~50/60 Hz 200 mA Total wattage: 7 W	220-240 V ~50/60 Hz 250 mA Total wattage: 8.6 W	2700 K	670 lm	720 lm	20°	UGR16	UGR19
	1006871	1006925				650 lm	720 lm	40°	UGR22	UGR19
	1006874	1006928				670 lm	720 lm	55°	UGR25	UGR22
	1006886	1006940			3000 K	730 lm	730 lm	20°	UGR16	UGR19
	1006889	1006943				700 lm	730 lm	40°	UGR22	UGR19
	1006892	1006946				720 lm	730 lm	55°	UGR25	UGR22
	1006869	1006923	220-240 V ~50/60 Hz 200 mA Total wattage: 7 W	220-240 V ~50/60 Hz 250 mA Total wattage: 8.6 W	2700 K	670 lm	690 lm	20°	UGR16	UGR19
	1006872	1006926				650 lm	690 lm	40°	UGR22	UGR19
	1006875	1006929				670 lm	690 lm	55°	UGR25	UGR22
	1006887	1006941			3000 K	730 lm	700 lm	20°	UGR16	UGR19
	1006890	1006944				700 lm	700 lm	40°	UGR22	UGR19
	1006893	1006947				720 lm	700 lm	55°	UGR25	UGR22
	1006877	1006931	220-240 V ~50/60 Hz 200 mA Total wattage: 7 W	220-240 V ~50/60 Hz 250 mA Total wattage: 8.6 W	2700 K	670 lm	720 lm	20°	UGR16	UGR19
	1006880	1006934				650 lm	720 lm	40°	UGR22	UGR19
	1006883	1006937				670 lm	720 lm	55°	UGR25	UGR22
	1006895	1006949			3000 K	730 lm	730 lm	20°	UGR16	UGR19
	1006898	1006952				700 lm	730 lm	40°	UGR22	UGR19
	1006901	1006955				720 lm	730 lm	55°	UGR25	UGR22
	1006876	1006930	220-240 V ~50/60 Hz 200 mA Total wattage: 7 W	220-240 V ~50/60 Hz 250 mA Total wattage: 8.6 W	2700 K	640 lm	670 lm	20°	UGR16	UGR19
	1006879	1006933				620 lm	670 lm	40°	UGR22	UGR19
	1006882	1006936				640 lm	670 lm	55°	UGR25	UGR22
	1006894	1006948			3000 K	700 lm	690 lm	20°	UGR16	UGR19
	1006897	1006951				670 lm	690 lm	40°	UGR22	UGR19
	1006900	1006954				690 lm	690 lm	55°	UGR25	UGR22
	1006878	1006932	220-240 V ~50/60 Hz 200 mA Total wattage: 7 W	220-240 V ~50/60 Hz 250 mA Total wattage: 8.6 W	2700 K	670 lm	690 lm	20°	UGR16	UGR19
	1006881	1006935				650 lm	690 lm	40°	UGR22	UGR19
	1006884	1006938				670 lm	690 lm	55°	UGR25	UGR22
	1006896	1006950			3000 K	730 lm	700 lm	20°	UGR16	UGR19
	1006899	1006953				700 lm	700 lm	40°	UGR22	UGR19
	1006902	1006956				720 lm	700 lm	55°	UGR25	UGR22

These lights are also available as 4000 K versions on request (except XS). Please note the different delivery times and minimum order quantities.




Product	Prod. no.	Output from / to	Dimmable	IP	Dimensions
LED driver 200 mA, 10 W QC	1005610	5.8 W / 8.4 W	-	20	L: 6.5 cm, W: 3.9 cm, H: 3.5 cm
LED driver 200 mA, 10 W, PHASE QC	1005609	6 W / 8.4 W	PHASE C		L: 8.5 cm, W: 4.1 cm, H: 3 cm
LED driver 200 mA, 10 W, DALI QC	1005611	3.8 W / 13.5 W	DALI		L: 18 cm, W: 4.5 cm, H: 3 cm
LED driver 200 mA, 12 W, DALI + RF Interface QC	1006457	1.5 W / 12 W	DALI + RF		L: 14.2 cm, W: 4.4 cm, H: 3 cm
LED driver 250 mA, 10 W	1004058	6.5 W / 10 W	-		L: 6.5 cm, W: 3.9 cm, H: 2 cm
LED driver 250 mA, 10 W, PHASE	1004055	7.5 W / 10 W	PHASE C		L: 8.5 cm, W: 3.9 cm, H: 3 cm
LED driver 250 mA, 20 W, DALI	1004067	1.5 W / 15 W	DALI		L: 15 cm, W: 5.2 cm, H: 2.8 cm
LED driver 250 mA, 12 W, DALI + RF Interface QC	1006458	1.5 W / 12 W	DALI + RF		L: 14.2 cm, W: 4.4 cm, H: 3 cm

M NUMINOS® PROJECTOR M
Ø 8 cm; L: 13 cm



L NUMINOS® PROJECTOR L
Ø 10 cm; L: 13 cm



	1006975	1007029	220-240 V ~50/60 Hz 500 mA Total wattage: 17.5 W	220-240 V ~50/60 Hz 700 mA Total wattage: 25.4 W	2700 K	1460 lm	2150 lm	20°	UGR22	UGR22
	1006978	1007032				1460 lm	2150 lm	40°	UGR22	UGR22
	1006981	1007035				1460 lm	2150 lm	55°	UGR22	UGR22
	1006993	1007047			3000 K	1500 lm	2150 lm	20°	UGR22	UGR22
	1006996	1007050				1500 lm	2150 lm	40°	UGR22	UGR22
	1006999	1007053				1500 lm	2150 lm	55°	UGR22	UGR22
	1006976	1007030	220-240 V ~50/60 Hz 500 mA Total wattage: 17.5 W	220-240 V ~50/60 Hz 700 mA Total wattage: 25.4 W	2700 K	1600 lm	2250 lm	20°	UGR22	UGR22
	1006979	1007033				1600 lm	2250 lm	40°	UGR22	UGR22
	1006982	1007036				1600 lm	2250 lm	55°	UGR22	UGR22
	1006994	1007048			3000 K	1600 lm	2300 lm	20°	UGR22	UGR22
	1006997	1007051				1600 lm	2300 lm	40°	UGR22	UGR22
	1007000	1007054				1600 lm	2300 lm	55°	UGR22	UGR22
	1006977	1007031	220-240 V ~50/60 Hz 500 mA Total wattage: 17.5 W	220-240 V ~50/60 Hz 700 mA Total wattage: 25.4 W	2700 K	1550 lm	2150 lm	20°	UGR22	UGR22
	1006980	1007034				1550 lm	2150 lm	40°	UGR22	UGR22
	1006983	1007037				1550 lm	2150 lm	55°	UGR22	UGR22
	1006995	1007049			3000 K	1550 lm	2200 lm	20°	UGR22	UGR22
	1006998	1007052				1550 lm	2200 lm	40°	UGR22	UGR22
	1007001	1007055				1550 lm	2200 lm	55°	UGR22	UGR22
	1006985	1007039	220-240 V ~50/60 Hz 500 mA Total wattage: 17.5 W	220-240 V ~50/60 Hz 700 mA Total wattage: 25.4 W	2700 K	1600 lm	2250 lm	20°	UGR22	UGR22
	1006988	1007042				1600 lm	2250 lm	40°	UGR22	UGR22
	1006991	1007045				1600 lm	2250 lm	55°	UGR22	UGR22
	1007003	1007057			3000 K	1600 lm	2300 lm	20°	UGR22	UGR22
	1007006	1007060				1600 lm	2300 lm	40°	UGR22	UGR22
	1007009	1007063				1600 lm	2300 lm	55°	UGR22	UGR22
	1006984	1007038	220-240 V ~50/60 Hz 500 mA Total wattage: 17.5 W	220-240 V ~50/60 Hz 700 mA Total wattage: 25.4 W	2700 K	1460 lm	2150 lm	20°	UGR22	UGR22
	1006987	1007041				1460 lm	2150 lm	40°	UGR22	UGR22
	1006990	1007044				1460 lm	2150 lm	55°	UGR22	UGR22
	1007002	1007056			3000 K	1500 lm	2150 lm	20°	UGR22	UGR22
	1007005	1007059				1500 lm	2150 lm	40°	UGR22	UGR22
	1007008	1007062				1500 lm	2150 lm	55°	UGR22	UGR22
	1006986	1007040	220-240 V ~50/60 Hz 500 mA Total wattage: 17.5 W	220-240 V ~50/60 Hz 700 mA Total wattage: 25.4 W	2700 K	1550 lm	2150 lm	20°	UGR22	UGR22
	1006989	1007043				1550 lm	2150 lm	40°	UGR22	UGR22
	1006992	1007046				1550 lm	2150 lm	55°	UGR22	UGR22
	1007004	1007058			3000 K	1550 lm	2200 lm	20°	UGR22	UGR22
	1007007	1007061				1550 lm	2200 lm	40°	UGR22	UGR22
	1007010	1007064				1550 lm	2200 lm	55°	UGR22	UGR22

These lights are also available as 4000 K versions on request. Please note the different delivery times and minimum order quantities.








Product		Prod. no.	Output from / to	Dimmable	IP	Dimensions
LED driver 500 mA, 30 W	White	1004064	15 W / 29.5 W	-	20	L: 14.7 cm, W: 4.3 cm, H: 3 cm
LED driver 500 mA, 30 W, PHASE	White	1004054	12.5 W / 21 W	PHASE C		L: 11.5 cm, W: 4.1 cm, H: 2.5 cm
LED driver 500 mA, 40 W, DALI	White	1004069	1.5 W / 40.6 W	DALI		L: 12.3 cm, W: 7.9 cm, H: 2.4 cm
LED driver 500 mA, 42 W, DALI + RF Interface QC	White	1006459	3.5 W / 42 W	DALI + RF		L: 12.3 cm, W: 7.9 cm, H: 3 cm
LED driver 1050 mA, 40 W	White	1004062	15 W / 29.5 W	-		L: 14.7 cm, W: 4.3 cm, H: 3 cm
LED driver 700 mA, 30 W, PHASE	White	1004065	21 W / 29.4 W	PHASE C		L: 11.5 cm, W: 4.4 cm, H: 3 cm
LED driver 700 mA, 40 W, DALI	White	1004070	1.5 W / 40.6 W	DALI		L: 12.3 cm, W: 7.9 cm, H: 2.4 cm
LED driver 700 mA, 42 W, DALI + RF Interface QC	White	1006460	3.5 W / 42 W	DALI + RF		L: 12.3 cm, W: 7.9 cm, H: 3 cm

NUMINOS® PROJECTOR

Choose your NUMINOS® PROJECTOR:

You can choose from six colour versions, four housing sizes with different total wattages, two light colours and three half-diffusion angles of 20°, 44° and 55°.

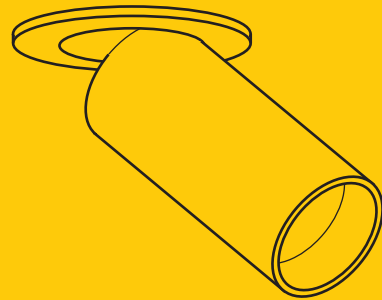

NUMINOS® is a perfectly coordinated lighting system that harmonises function, design and technology. For planners and doers. For every need. For maximum variety with minimum effort.





Discover the variety of
NUMINOS® Series on
slv.com

The new NUMINOS® PROJECTOR with a very high rotation and pivot range is a good complement to the NUMINOS® downlights, which have the same decorative and visual possibilities

Available in four housing sizes with high-power LED module in two light colours.

LED drivers are available separately.

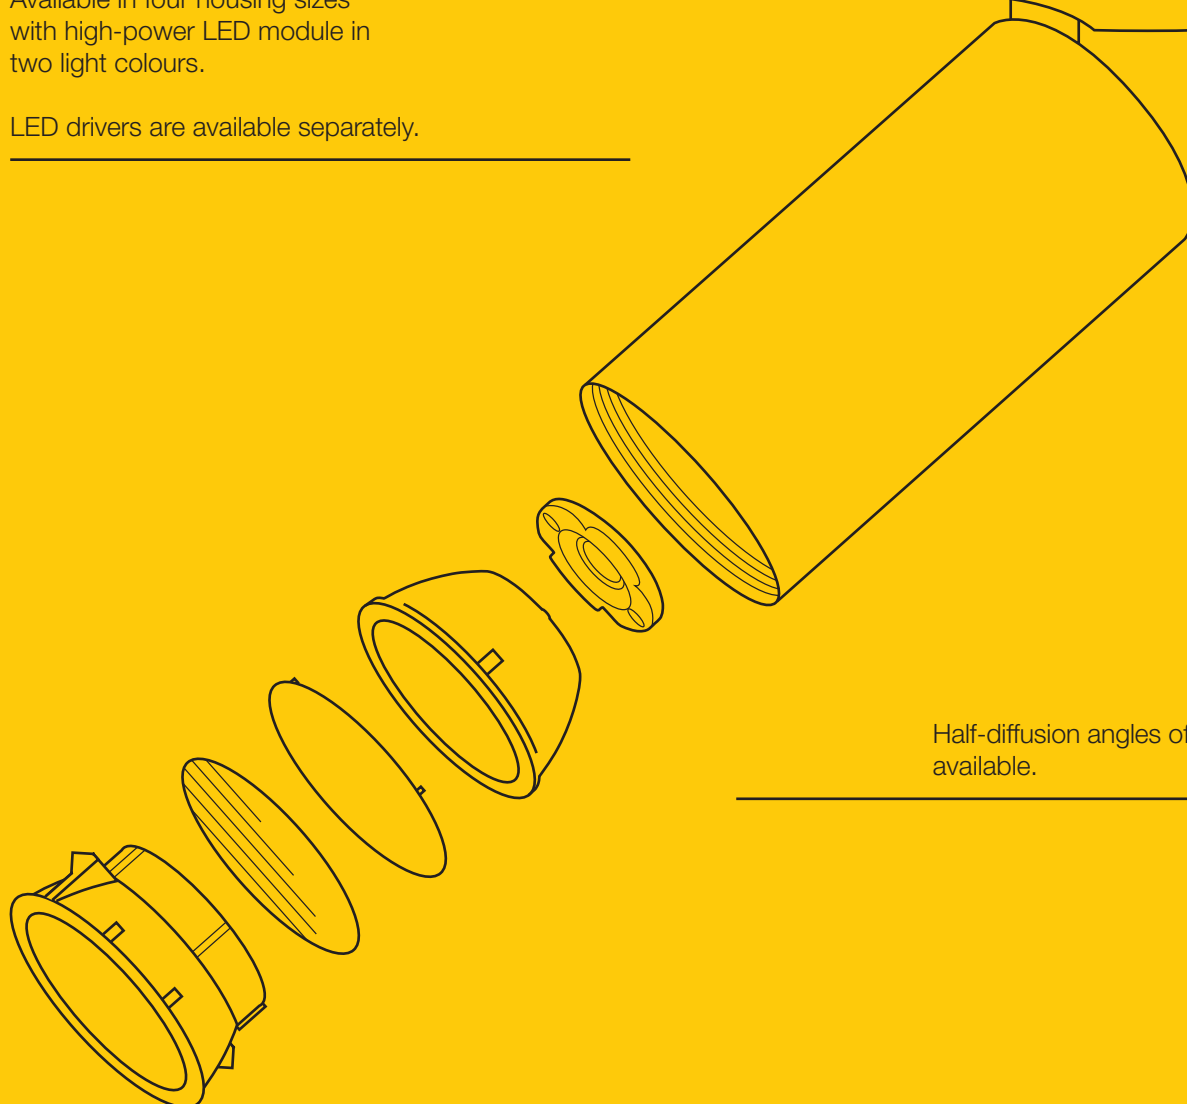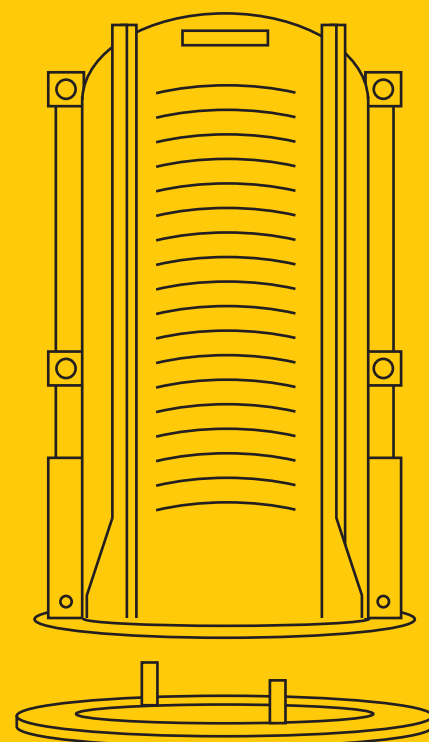

Half-diffusion angles of 20° | 40° | 55° available.



OVAL

Flat design, oval shape, two-lamp lighting: OVAL illuminates walls so indirectly that an exciting ambience is created. The appropriate light colour temperature, which can be set between warm white 2700 K or 3000 K via CCT switch, ensures comfort.



OVAL 14

220-240 V ~50/60 Hz | 145 mA
Total wattage: 5.7 W

● Black ○ White

OVAL 18

220-240 V ~50/60 Hz | 275 mA
Total wattage: 9.3 W

Material: Aluminium / Polycarbonate (PC)

Version	Prod. no.	Lumen	Kelvin	CRI	Dimensions
WL 14	Black 1007142	Up / Down: 280 / 280 lm	2700 / 3000 K	80	L: 13.5 cm, W: 3.1 cm, H: 9 cm
	White 1007143				
WL 18	Black 1007144	Up / Down: 430 / 430 lm	2700 / 3000 K	80	L: 17.5 cm, W: 3.1 cm, H: 9 cm
	White 1007145				




fischer 

Including fischer
DUOPOWER dowel

ASTO TUBE

Simply elegant: Available in one to four head options, these lights are particularly variable in use. With additionally available decorative reflectors in different colours and freely selectable light sources, the ASTO TUBE can be individually adapted to the surroundings and room design.



ASTO TUBE CW

220-240 V ~50/60 Hz



Black



White

Material: Aluminium

Version	Prod. no.	Base	Watt	Dimensions
CW	Black, single	1 x GU10	max. 10 W	Ø 7 cm; L: 12.5 cm, H: 13 cm Ceiling rosette: Ø 10 cm, H: 3 cm
	White, single			
CW	Black, double	2 x GU10	max. 10 W	Ø 7 cm; L: 12.5 cm, H: 13 cm Ceiling rosette: L: 25 cm, W: 10 cm, H: 3
	White, double			
CW	Black, triple	3 x GU10	max. 10 W	Ø 7 cm; L: 12.5 cm, H: 13 cm Ceiling rosette: L: 35 cm, W: 10 cm, H: 3
	White, triple			
CW	Black, quadruple	4 x GU10	max. 10 W	Ø 7 cm; L: 12.5 cm, H: 13 cm Ceiling rosette: Ø 25 cm, H: 3 cm
	White, quadruple			



Product	Prod. no.
Decorative reflector	Chrome
	Gold
	Copper
	Black / Chrome





LED GU10

51 mm | 6 W | 38°

1005076

2700 K | 450 lm | EEK=F
6 kWh/1000 h



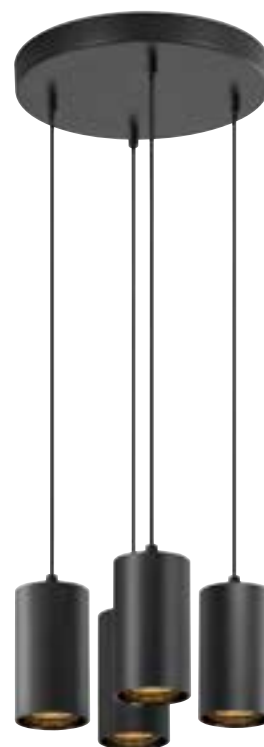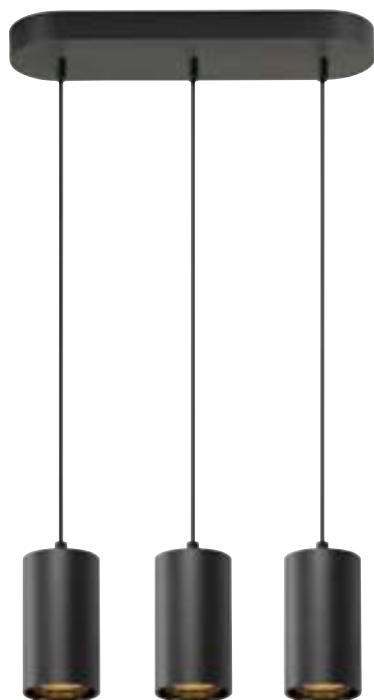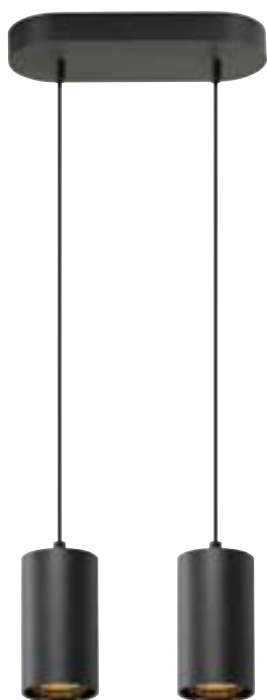

ASTO TUBE PD

220-240 V ~50/60 Hz

● Black ○ White

Material: Aluminium

Version	Prod. no.	Base	Watt	Dimensions
PD	Black, single	1 x GU10	max. 10 W	Ø 7 cm; L: 12.5 cm Ceiling rosette: Ø 10 cm, H: 3 cm
	White, single			
PD	Black, double	2 x GU10	max. 10 W	Ø 7 cm; L: 12.5 cm Ceiling rosette: L: 25 cm, W: 10 cm, H: 3 cm
	White, double			
PD	Black, triple	3 x GU10	max. 10 W	Ø 7 cm; L: 12.5 cm Ceiling rosette: L: 35 cm, W: 10 cm, H: 3 cm
	White, triple			
PD	Black, quadruple	4 x GU10	max. 10 W	Ø 7 cm; L: 12.5 cm Ceiling rosette: Ø 25 cm, H: 3 cm
	White, quadruple			



Product	Prod. no.
Decorative reflector	Chrome
	Gold
	Copper
	Black / Chrome

LED GU10

51 mm | 6 W | 38°

1005076

2700 K | 450 lm | EEK=F
6 kWh/1000 h






Decorative reflector in
housing colour included.
Further reflectors
individually
selectable.







**SOCKET
INSIDE**



**SOCKET
INSIDE**

ASTO TUBE WL & CL

220-240 V ~50/60 Hz

ASTO TUBE 1-PHASE

220-240 V ~50/60 Hz



Black



White

Material: Aluminium

Version		Prod. no.	Base	Watt	Dimensions
WL	Black, single	1006441	1 x GU10	max. 10 W	Ø 7 cm; H: 15.5 cm
	White, single	1006442			
WL	Black, up / down	1006443	2 x GU10	max. 10 W	L: 20 cm, W: 7 cm, H: 9.5 cm
	White, up / down	1006444			
CL	Black, single	1006439	1 x GU10	max. 10 W	Ø 7 cm; H: 15.5 cm
	White, single	1006440			
1 PH	Black	1006445	1 x GU10	max. 10 W	Ø 7 cm; L: 12.5 cm, H: 10.7 cm
	White	1006446			



Product		Prod. no.
Decorative reflector	Chrome	1006449
	Gold	1006450
	Copper	1006451
	Black / Chrome	1007190

LED GU10 51 mm | 6 W | 38°

1005076

2700 K | 450 lm | EEK=F
6 kWh/1000 h



Decorative reflector in housing colour included. Further reflectors individually selectable.



SYNA

SYNA cuts a strong figure in any outdoor area. The ground spike lights can be flexibly positioned, quickly installed and firmly fixed in the ground. The IP65-protected outdoor spotlights can be pivoted and thus enable targeted illumination of plants, beds and garden areas.



IP65
 IK06
 36°
 L70B50
 300°
 150
 180°

SYNA GARDEN SP

220-240 V ~50/60 Hz | 250 mA
 Total wattage: 6 W
 IP44 safety plug

SYNA PLANT SP

220-240 V ~50/60 Hz | 250 mA
 Total wattage: 6 W
 IP44 safety plug

Black

Material: Aluminium

Version		Prod. no.	Lumen	Kelvin	CRI	Dimensions
SP	Black, SYNA GARDEN	1007147	540 lm	3000 K	80	Ø 6.3; L: 11.4 cm, H: 29.5 cm
	Black, SYNA PLANT	1007146				Ø 6.5; L: 10.9 cm, H: 29.5 cm



CONCRETO

Pioneering light made of the trendy material concrete: CONCRETO also sets strong accents outdoors as a recessed and wall-mounted wall light. The unique design is robust and modern at the same time. In addition, the outdoor lights are protected against water jets from all directions thanks to their protection code IP65.



CONCRETO EL

100-240 V ~50/60 Hz | 700 mA
Total wattage: 3.2 W

CONCRETO M WL

220-240 V ~50/60 Hz | 700 mA
Total wattage: 8.5 W

CONCRETO L WL

220-240 V ~50/60 Hz | 700 mA
Total wattage: 12 W

● Grey

Material: Concrete

Version		Prod. no.	Lumen	Kelvin	CRI	Dimensions
EL	Grey, Wing	1006406	45 lm	3000 K	80	L: 10 cm, W: 6.5 cm, H: 10 cm
	Grey, Cut	1006407	15 lm			
WL	Grey, M	1006404	270 lm	3000 K	80	L: 25 cm, W: 8 cm, H: 15 cm
	Grey, L	1006405	470 lm			L: 37.5 cm, W: 8 cm, H: 25 cm



Anti-fogging
thanks to integrated
mirror heating



TRUKKO

Bathroom lighting can be this functional: TRUKKO is a wall mirror and wall-mounted light at the same time. Thanks to the CCT selection between 3000 K, 4000 K or 6500 K, both evening make-up and morning shaving can be done in perfect light. And of course, with its protection code IP44, it is protected against splash water and condensation on all sides in wet rooms.



TRUKKO WL

220-240 V ~50/60 Hz | 24 V
Total wattage: 25 W

● Black ○ Transparent

Material: Glass

TRUKKO 80 WL

220-240 V ~50/60 Hz | 24 V
Total wattage: 23 W


Version	Prod. no.	Lumen	Kelvin	CRI	Dimensions
WL black, round	1007201	730 / 719 / 720 lm	3000 / 4000 / 6500 K	90	Ø 61 cm; D: 3.2 cm
WL black, 80, round	1007202	730 / 740 / 790 lm	3000 / 4000 / 6500 K	90	Ø 80 cm; D: 3.2 cm
WL Transparent, 80, round	1007200	1100 / 1130 / 1210 lm			Ø 80 cm; D: 2.8 cm

UNIVERSAL DOWNLIGHT

High-quality, modern, universally applicable:
With its colour temperature adjustable via CCT switch
(2700 / 3000 / 4000 / 6500 K), the UNIVERSAL
DOWNLIGHT offers a high degree of flexibility. The
quick connector makes installation a breeze.



New bezel finish
in Matt Gold



UNIVERSAL DOWNLIGHT

220-240 V ~50/60 Hz | 60/90 mA

Total wattage: 5/8 W

Material thickness of installation surface: max. 25 mm



● Black

Material: Steel

Version		Prod. no.	Lumen (5 W / 8 W)	Kelvin	CRI	Dimensions
DL	Black, Move	1007090	410 / 860 lm	2700 K	90	Ø: 8.5 cm, H: 6.1 cm
			430 / 610 lm	3000 K		
	Black		470 / 680 lm	4000 K		
		1007095	440 / 640 lm	6500 K		Ø: 8.5 cm, H: 4.6 cm

A bezel is not included in the scope of delivery as standard and must always be ordered separately.



● Black


○ White

● Chrome

● Polished Gold

● Matt Gold

Product		Prod. no.	Dimensions
Cover Move	Black, square	1007184	L: 8.8 cm, W: 8.8 cm, H: 0.35 cm
	White, square	1007185	
	Chrome, square	1007186	
	Gold glossy, square	1007187	
	Gold matt, square	1007194	
	Black, round	1007091	Ø 8.8 cm; H: 0.35 cm
	White, round	1007092	
	Chrome, round	1007093	
	Gold, round	1007094	
	Gold, matt, round	1007191	
Cover	Black, square	1007180	L: 8.8 cm, W: 8.8 cm, H: 0.35 cm
	White, square	1007181	
	Chrome, square	1007182	
	Gold glossy, square	1007183	
	Gold matt, square	1007193	
	Black, round	1007096	Ø 8.8 cm; H: 0.35 cm
	White, round	1007097	
	Chrome, round	1007098	
	Gold, round	1007099	
	Gold, matt, round	1007192	

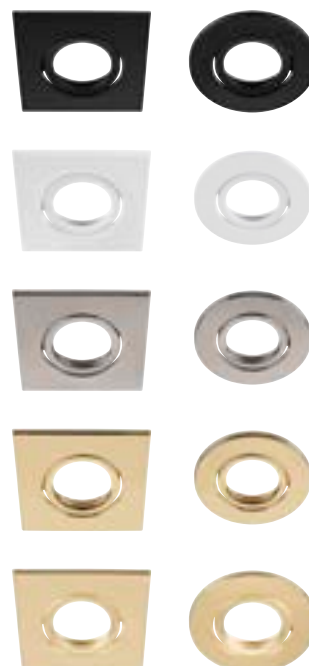

DESIGN YOUR DOWNLIGHT

Unobtrusive and universally applicable: the UNIVERSAL DOWNLIGHT as a rigid and pivoting version are recessed lights that produce a targeted light with their narrow beam angle of 36 degrees. A wide range of colour temperature options (2700 / 3000 / 4000 / 6500 K) can be selected via the CCT switch before installation. Natural colour reproduction is achieved with a CRI of over 90. The Quick Connector Box ensures the downlight is quick and easy to install. Complement your universal downlight with the separately available bezel, available in black, white, chrome, polished gold and matt gold.

CHOOSE YOUR FAVOURITE ...


- 1 version (rigid, pivoting)
- 2 Cover (black, white, chrome, polished gold, matt gold)
- 3 Colour temperature (2700 K, 3000 K, 4000 K, 6500 K)
- 4 Total wattage (5 W, 8 W)



READY!


UNIVERSAL DOWNLIGHT

UNIVERSAL DOWNLIGHT

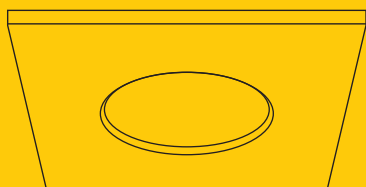


Available as rigid version



UNIVERSAL DOWNLIGHT MOVE

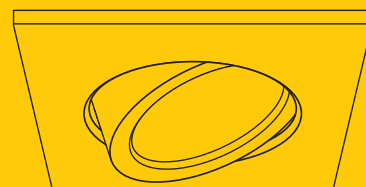


Available as a pivoting version

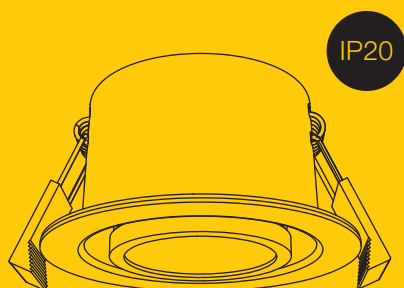

Easy installation by means of quick connector
connection box

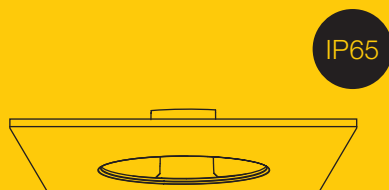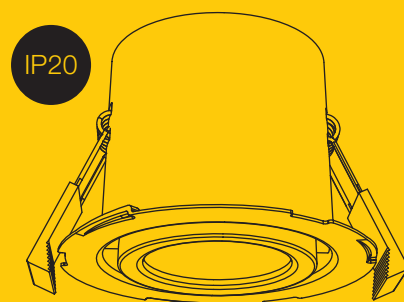

Replaceable bezel in square or round and
in the colours black, white, chrome,
polished gold or matt gold

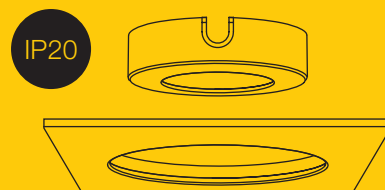

2700 K 3000 K 4000 K 6500 K

Switchable colour temperature

2700 K 3000 K 4000 K 6500 K

Switchable total wattage
5 W / 8 W

High light quality and colour reproduction
thanks to LED with CRI90

NEW ACCESSORIES

LED QPAR111

This lamp with a very long lifespan of 40,000 hours impresses with excellent glare reduction due to its large reflector surface. With its unique shape, it matches the SLV KALU light family in particular.



Suitable for the
SLV KALU
light family



Product		Prod. no.	Kelvin	Lumen	Lifetime	CRI	Wattage	IP	Dimensions	EEC
LED QPAR111 <i>GU10</i>	silver	1005297	2700 K	670 55°	L70B50 h 40,000	90	12	20	Ø: 11 cm, H: 7 cm	G
		1005298	3000 K							
		1005299	4000 K							

LED POWER SUPPLY

The TÜV certified LED 24 V power supply impresses with its good value for money. In addition, this accessory is phase dimmable and can be used variably for your lighting project.



LED POWER SUPPLY 25 W | 24 V

☐ White

Material: Polycarbonate (PC)

Product		Prod. no.	Output from / to	Dimmable	IP	Dimensions
LED driver 25 W	white	1006336	9.6 W / 25 W	PHASE C, L	20	L: 12.8 cm, W: 5.2 cm, H: 3 cm

CONTROLLER

A controller for every application: With its four different device modes DIM, CCT, RGBW and RGB+CCT, it enables the control of light intensity, colour temperature and RGB colour of the connected LED lights.

Zigbee Green Power is supported.

This controller is ideally suited for the SLV GRAZIA light family.



CONTROLLER

☐ White


Material: Polycarbonate (PC)

Product		Prod. no.	Output		IP	Dimensions
Controller 5-channel LED Strip CCT / RGB	white	1006348	24 V: 5 x 96 W	Zigbee	20	L: 14.5 cm, W: 4.65 cm, H: 1.6 cm

COLOUR EXPLANATION




Anthracite



Black



Grey



White



Chrome



Silver



Gold

EXPLANATION OF SYMBOLS



Dimmable with:

- **C** = Trailing-edge phase dimmer
- **SWITCH** = Switch / button or touch control on the light
- **DALI** = DALI bus system



Connected lighting:

Indicates smart products that use the DALI protocols



Protection classes:

- Protection class I / protective conductor
- Protection class II / protection by double or reinforced insulation



IP protection type:

Indicates the suitability of electrical equipment for different environmental conditions.



IK impact resistance level:

The IK impact resistance level is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.




Half-diffusion angle:

Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.



Unified Glare Rating:

The lower the UGR value, the lower the psychological glare.



Rotation and pivoting capacity in degrees:

- Rotation range
- Pivot range



- Power cable length in cm
- Supply cable length in cm (with open cable end)



Pendant cable length in cm



Through-wiring possible



CCT switch:

By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.



- Products with integrated LEDs
- Products with lamp socket



Specification of the installation depth



Specification of the cut-out shape and the installation dimensions





ASTO TUBE
38

A large part of the products shown in this brochure are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this brochure are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. Product descriptions and specifications are subject to correction and amendment.

All of the products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This brochure contains a general range and is not country specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards. All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical changes.

SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value added tax or procurement prices.

SLV GmbH | Daimlerstraße 21-23, 52531 Uebach-Palenberg, Germany, +49 (0) 2451 4833-333, info@slv.de
SLV Austria | +49 (2451) 4833 355, export@slv.de
SLV Belgium | Herentalsebaan 429, B-2160 Wommelgem, +32 (0) 3/385 30 08, info@slv.be
SLV Nordics | Flade Engvej 4, 9900 Frederikshavn, Denmark, +45 9310 7474, info@nordics.slv.com
SLV France | Zac du Martelet, 88, rue Henri Dépaigneux, F-69400 Limas, +33 4 74 02 71 20, infofr@slv.com
SLV LIGHTING UK LTD | Unit E Chiltern Park, Boscombe Road, Dunstable, LU5 5LT, +44 (0)203 968 11 00, sales@uk.slv.com
SLV Italia S.r.l. | Via Lecco, 19/D, 23896 Bevera di Sirtori (LC), +39 039 5983575, infoit@slv.com
SLV Nederland | Kazernestraat 19, 5928 NL Venlo, +31 773204343, info@slv.nl
SLV Norway AS | Vangsveien 10, 1814 Askim, +47 48225500, post@slvnorway.no
SLV Poland | ul. Poznańska 356, 05-850 Ożarów Maz., Polska, (0048 22) 722-49-75, slv@slv.pl
SLV Portugal | R. Margarida de Abreu, no13 – Lj2, 1900-314 Lisboa, +351 210 185 961, info@pt.slv.com
SLV Swiss SA | Route du Bey 6 Box 1-4, Z.I. La Jonnaire, CH-1847 Rennaz, +41 218113232, info@slv-swiss.ch
SLV d.o.o | Barjanska cesta 50, SI-1000 Ljubljana, +386 1 2009 730, info@slv.si
SLV Spain | Antic Camí Ral Valencia, 38, L17, 08860 Castelldefels, Barcelona, 931 168 161, info@slv.es
SLV Czech s.r.o. | V Sedlci 28/17, CZ-160 00 Praha 6, +420 739 282 151, info@cz.slv.com

slv.com